


MÖRE

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	151NCSEK03KW240	Design	1-strip	Moisture	EN13183	7%±2%
EAN Code	7393969038980	Grading	Dynamic	content		
Surface Treatment	Oil This floor should be oiled immediately after installation.	Range	Kährs Supreme	Minimun Mean Density kg/m ³ >500 kg/m ³		
		Collection	Småland Collection	Reaction To Fire	EN13501-1	Dfl-s1
		Resandable	2 times	Formaldehyde Emission	EN717-1	E1
Dimensions	95 1/4 x 7 3/8 x 5/8"	Natural/Stained	Stained			
Weight per Package	48.5 lbs	Brinell Value	3,7	Content PCP	CEN/TR14823	3 ≤ 5 x 10-6n
Area per Package	29.1 sqft	Joint	Woodloc® 5S	Breaking	EN1533	NPD
Area per pallet (m²)	1317.5 sqft	Floor heating	Yes	Strength N/mm²		
Package info	Packages may contain start and stop boards.		30 years	Thermal	EN12664	0,14 W/mK
		Wear-layer material	Hardwood	Conductivity		
DETAIL DESCRIPTION		Core material	Pine/Spruce lamella	Thermal Resistance R-Value		.11 (m2K/W)
All naturally occuring wood colour variations allowed, from light to dark brown. Sapwood may occur. The product includes very large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.			5/8"	Biological Durability	EN350-2	Class 1
		Installation method	Floating, Glue-Down	CARB2		Compliant
		Installation method	Floating, Glue-Down			compilant

COLOR CHANGE

Stained product - noticable color change over time.

Other products in this collection

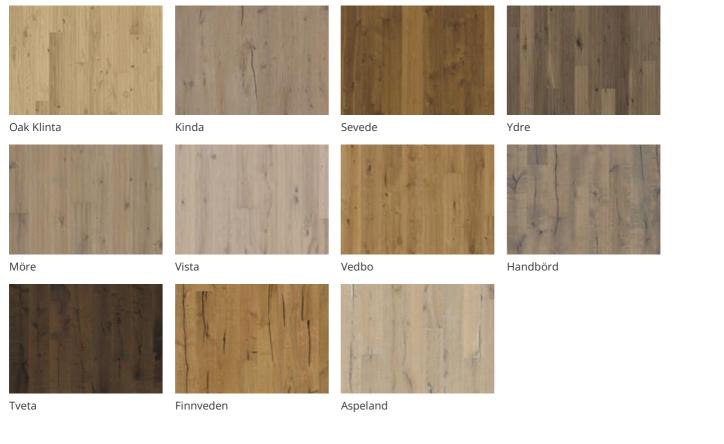

CERTIFICATES



Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.