



Model: ARTISAN 1L COCONUT
Codes: 100103574 - L160803284
Group: G-268
Format: 19X190X1,5
Thickness: 15 mm

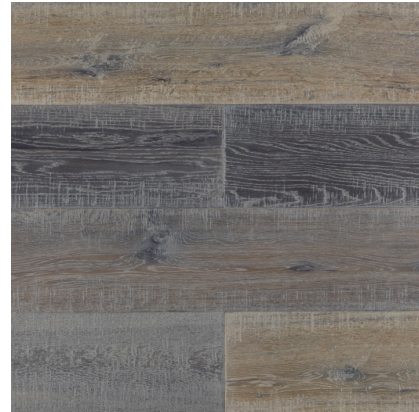

ADDITIONAL NOTES

Although the tone of the skirtings, profiles and rungs of steps can vary, depending on the model, the color will be as similar as possible to the wooden floor. Due to better usage of the wood, any order of this reference may contain mean percentage tables of between 20% and 25%.

COMPOSITION



	Size	Material	Type of material
Layer 1	0.060-0.070	Oil	Natur treatment
Layer 2	4	Hardwood Layer	Madera de Roble
Layer 3	9	Intermediate Layer	Wood or HDF slats
Layer 4	2	Backside	Coniferous wood

LABORATORY TESTS

Biological durability	Clase 1	UNE EN 335 -1 ; UNE EN 335-2*
Bulk density	740 Kg/m3	UNE-EN 323:1994*
Critical radiant flux	Clase 1	ASTM E 648*
Flammability	Dfl-s1	EN 13501*
Formaldehyde emissions	E1	EN 717*
Heat resistance	0.11 M2**K/W	UNE-EN 12667:2002*
Moisture content	8.00%	UNE-EN 13183-1/AC:2004*
Slip resistance	45/63	UNE-CEN/TS 15676:2008*
Smoke density (burning)	<450 Dmc	ASTM E 662*
Thermal conductivity	0.13 W/M**K	UNE-EN 12667:2002*

FEATURES

-  This installation system consists in assembling the boards with slots and cuts on their edges by applying a slight pressure on the boards. The boards are then bonded with white glue. Tools are needed for the installation.
-  Slight smoothing of the wood using a brush to achieve a surface with a slight relief.
-  Beveled cut on all 4 edges of the board for emphasizing size
-  **30** Quality product made with selected raw materials, guaranteeing its full residential use for 30 years as provided by L' Antic Colonial.
-  Format where only one board has been used to finish the entire base surface
-  It is necessary to apply adhesive for installing it.
-  **OAK** Made with oak wood.
-  Material from a North American country.
-  Structure formed by an upper layer that shows the noble aspect of the material, an intermediate layer of wood of different typology, depending on the collection, or HDF board that compensates the tensions between the different parts and a lower plywood that provides dimensional stability.
-  The finish imitates traditional hand brushing of the wood, providing a rough and artisan look as the one cabinetmakers would achieve in the past.
-  Applying a color oil or varnish on the wood surface in order to get different color ranges.
-  **N** Combination of oils and natural waxes with air drying that leave the wood with open pores. This type of oil penetrates into the wood continuously, even when it is fitted, so that it may have a 'dry' look when opened to be installed. Advantages: Easy repair of dents and scratches, very natural look, and easy maintenance with the right products. Right after installing and before its first use we recommend the use of CLEAN&GREEN AQUA OIL 1 L.
-  Is suitable for installing on water radiant heating
-  Material with many knots on its surface that can have different sizes depending on the type of wood. These, along with any cracks that may appear, are covered with putty.
-  Installation system where gluing the boards to the floor is not necessary. They are installed on a foam and joined together
-  There are considerable color changes between pieces.
-  Material from a European country.
-  Noble layer

PACKING

Base unit	PIECES	
Boxes	2.166 M2/BOX	
Gross weight	11.2909 KG/M2	
Net weight	10.651 KG/M2	
Pallets	75.81 M2/PAL	
Sale unit	M2	
Square meters	1 M2	

SPECIAL PIECES

SAP	KEA	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100114965	L165002599	IGUALACION ARTISAN COCONUT 4,5X270X1,3	G-161	10 ST/CS	1000 ST/PAL	9.26 ST/M2	ST	ST	1 KG/ST	1.02 KG/ST
100176565	L165003615	MAMPERLAN ARTISAN 1L COCONUT 120X7X3	G-163	2 ST/CS	200 ST/PAL	11.9 ST/M2	ST	ST	1.58 KG/ST	1.64 KG/ST
100114967	L165002600	TRANSICION ARTISAN COCONUT 4X270X1,3	G-161	10 ST/CS	1000 ST/PAL	9.26 ST/M2	ST	ST	1 KG/ST	1.02 KG/ST
100111711	L165002380	ZOCALO ARTISAN COCONUT 8X220X1,4	G-128	12 ST/CS	600 ST/PAL	5.68 ST/M2	ST	ST	1.33 KG/ST	1.38 KG/ST

