Bathroom Taps

ROUND INOX




Description


Concealed bath shower valve with Ø35 mm ceramic cartridge, automatic diverter and 1/2" connectors. Flow rate at 3 bar: 20,98 l/min bath, 22,57 l/min shower.

Finish

100283381

Flow rate diagramme								Technical drawing
Pressure (bar)	0	0.5	1	2	3	4	5	
Flow - bath (I/min) (±15%)	0	8.75	12.4	17.58	21.53	24.92	27.9	- 🗓 🕚
Flow - handshower (I/min) (±15%)	0	9.76	13.81	19.56	24.02	27.78	31.04	-

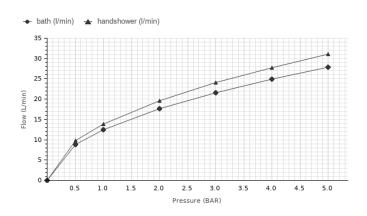



Dimensions in mm



Warranty:For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.