


Model: AC5 EMOTION 1L NATURAL

Codes: 100354572

Group: G-222

Format: 14,3X64,4X0,8CM

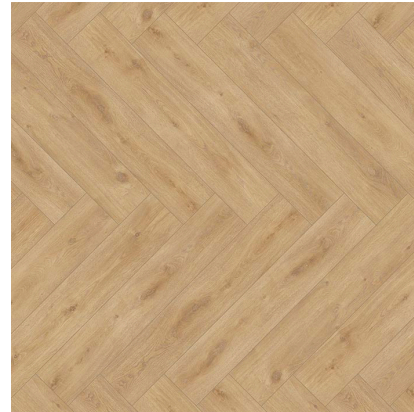

COMPOSITION

	Size	Material	Type of material
Layer 1	0.2	Melamine	Aminoplastic thermosetting resins
Layer 2	0.2	Decorative paper	
Layer 3	7.5	HDF	High-density Fiber Board and water-repellent glues
Layer 4	0.1	Backside	Sheets of kraft paper impregnated with phenolic resins



CERTIFICATIONS

Carb certification	CARB: Phase II compliant
--------------------	--------------------------

FEATURES

- Beveled cut on all 4 edges of the board for emphasizing size
- Gloss-free
- Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
- 5 year warranty for commercial use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
- 20 year warranty for domestic use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
- Is suitable for installing on water radiant heating
- PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests
- 23. Intensive residential
- 33. Intensive commercial
- Suitable for bathroom and kitchen floors for residential use, provided that the product's installation instructions are always followed.

DIMENSIONAL FEATURES

Squareness of the item (q)	≤0.20 mm	EN 13329*
Joint between items	≤0.20 mm	EN 13329*
Difference in height among items	≤0.15 mm	EN 13329*
Uv light fastness	≥4	EN 438-2,16*
Surface stripping	≥1.25 N/MM2	EN 13329*



LABORATORY TESTS

Resistance to abrasion	AC5	EN 13329*
Impact resistance	≥1000 mm/≥15 N	UNE EN 13329*
Resistance to staining	Grado 5 (G 1 y 2) y Grado 4 (G 3)	EN 438*
Swelling in thickness	≤15%	EN 13329*
Moisture upon leaving factory	4-10 %	
Dimensional stability	≤0.90 MM	EN 13329*
Formaldehyde emissions	E1	EN 13329*
Slip resistance (pendulum-wet)	CL 1 (23)	UNE 41901*
Tensile strength of joints	>1.0 kN/m	EN 13329*
Fire resistance	Cfl-s1	EN 13501*
Heat resistance	0.061 M2*K/W	EN 12667*
Thermal conductivity	0.122 W/M*K	EN 12667*
Slip resistance (dcof)	0.51	ANSI A137.1*
Density of the board	828 ±5 KG/M3	UNE EN 323*
Slip resistance (pendulum-dry)	CL 3 (90)	UNE 41902*

PACKING

Sales units per box	1.84184 M2/BOX	
Sales units per pallet	110.510389 M2/PAL	
Sales units per unit	0.092092 M2/PIECE	
Sale unit	M2	
Base unit	ST	
Sales units per square meter	1 M2	
Net weight	8.198324 KG/M2	
Gross weight	8.491509 KG/M2	

SPECIAL PIECES

SAP	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100354762	IGUALACION EMOTION 1L NATURAL 4X270X1	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.7 KG/PIECES	0.72 KG/PIECES
100354766	MAMPERLAN EMOTION 1L NATURAL 7X64,4X3	G-163	2 PIECES/BOX	200 PIECES/PAL	22.18 PIECES/M2	-	-	1.58 KG/PIECES	1.64 KG/PIECES
100354754	TRANSICION EMOTION 1L NATURAL 4X270X1	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.7 KG/PIECES	0.72 KG/PIECES
100354746	ZOCALO EMOTION 1L NATURAL 8X225X1,4	G-107	12 PIECES/BOX	648 PIECES/PAL	5.56 PIECES/M2	-	-	1.57 KG/PIECES	1.62 KG/PIECES

