

Bathroom Taps



OXO

Description

Thermostatic shower column with built-in wax thermoelement and satin stainless structure. Integrated shower head, hand shower support fixed on the column and bath filler spout. 3 rain functions handshower with diverter. With 1/2 "connections, it includes an anti-return valve, a safety stop at 38°, the flow rate at 3 bars of the hand shower is of 7,5 l/ min, of the shower head 6,9 l/ min, of the jets of 15 l/ min and the spout 16,9 l/min.

Finish



brushed titanium
100340898

Other Finishes



brushed copper
100343449




Matt black
100333801



polished stainless steel
100333800

Technical drawing

Dimensions in mm

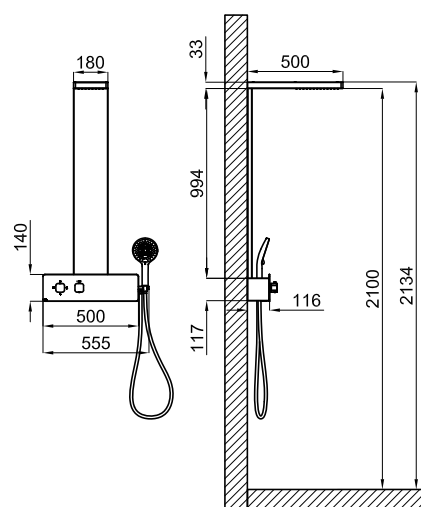

noken
PORCELANOSA BATHROOMS

Warranty: For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.

© 2024 noken | Edition: 15/04/2024 INT Ref.152321