


Basic Parameters

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: ϕ 45mm optional
- IP grade: IP20
- CCT: 2700/3000/3500/4000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Spotlight angle: 12°-50°
- Light efficiency: 50 lm/W
- Input voltage: DC48V
- Dimming method: Non / DALI-2 / Tuya Bluetooth / CASAMBI
- Application: Indoor
- Certification: CE、UKCA、 ROHS、 Reach
- Warranty: 3 years




Luminaire Parameters

Version	Model	Size	Input Voltage (V)	Max. Current (A)	Type Power (W)	Max. Power (W)	CRI	Beam Angle	CCT	Lumen (LM)
Normal	M20SZ-45	45.0mm [0.15ft]	48VDC	0.11 [0.73A/ft]	5.0 [33.33W/ft]	5.5 [36.67W/ft]	>90	12°-50°	2700K	225
									3000K	235
									3500K	240
									4000K	250


Note:

1. The output data is based on the testing result of Ra90,4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

[Optical Parameter]

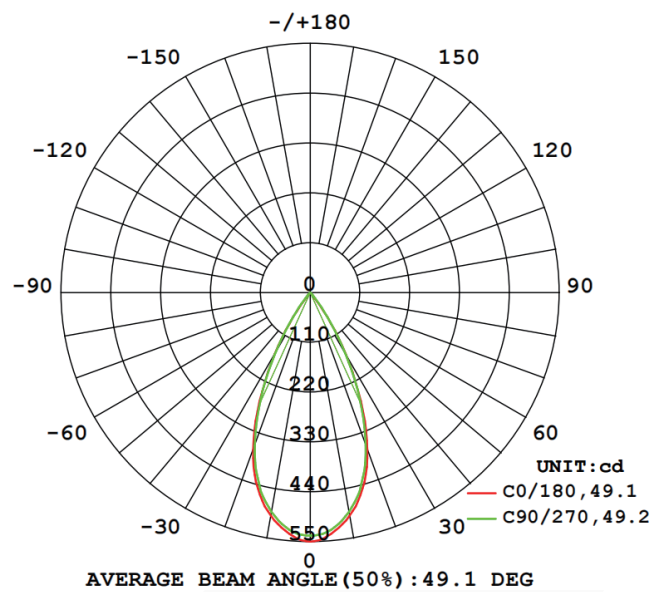

Luminous intensity
distribution diagram

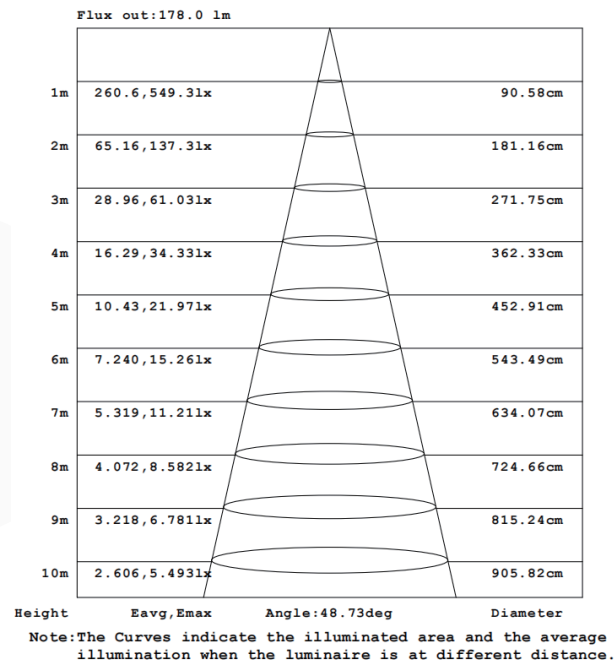

AAI Figure

[Product mechanical data]

