


【General description】


- Super slim width with board width only 5mm
- 24V single LED per cut for more flexible application
- Mini cutting unit up to 8.33mm
- Parameter matches with traditional ones, better for stock management
- Self-encapsulated design offers 6 optional 2300-6000K white lights
- With life span over 60000H
- Ta: -25~40°C; Tc: 75°C (max)

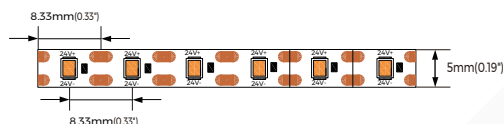


【Dimension】

Input voltage: DC24V
 CRI: 90
 Max.power: 10.6W(1m)
 Power range: 8.8~10.6W(1m)
 Rated current: 0.4A(1m)
 Typical Power: 9.6W(1m)
 tape IP: IP20/IP65
 On-off times: 10000 (test times)
 Warranty: 5years

Max.length: 5000mm(16.4')
 Cutting unit: 1leds/8.33mm(0.33")
 LED pitch: 8.33mm(0.33")
 Min. bend diameter: Φ 60mm(2.36")
 Mounting: 3M tape
 Copper foil: 3oz



· Photometric of 1M strip



· AAI Figurestrip

【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>90	LW	2300K	1000	304	104	F
Ra>90	SW	2700K	1100	335	116	F
Ra>90	WW	3000K	1200	365	126	E
Ra>90	PW	3500K	1200	365	126	E
Ra>90	NW	4000K	1300	396	135	E
Ra>90	W	6000K	1250	381	130	E

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/Imeter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.