



◎ Basic Parameters

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Length: 110mm, 220mm, 440mm optional
- IP grade: IP20
- CCT: 2700K, 3000K, 4000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Beam angle: 30°, 55°
- Light efficiency: 73 LM/W, 68 LM/W
- Input voltage: DC24V-48V, DC48V
- Lighting direction: Downward
- Dimming method: Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years



◎ Product mechanical data

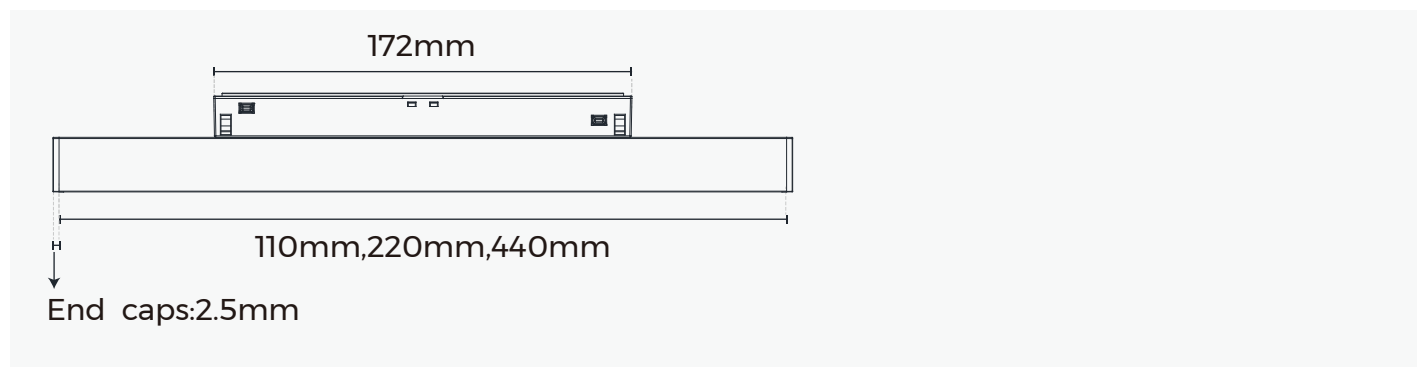

©Luminaire Parameters

Version	Model	Length	Input Voltage (V)	Max. Current (A)	Type Power (W)	Max. Power (W)	CRI	Beam Angle	CCT	Lumen (LM)
Normal	MT20G	110mm [0.36ft]	48VDC 24-48VDC	0.25-0.125	6.0 [16.67W/ft]	6.6 [18.33W/ft]	>90	30°	2700K	400 [110LM/ft]
									3000K	410 [140LM/ft]
									4000K	440 [1220LM/ft]
Normal	MT20G	110mm [0.36ft]	48VDC 24-48VDC	0.25-0.125	6.0 [16.67W/ft]	6.6 [18.33W/ft]	>90	55°	2700K	370 [1030LM/ft]
									3000K	380 [1050LM/ft]
									4000K	410 [1140LM/ft]
Normal	MT20G	220mm [0.72ft]	48VDC 24-48VDC	0.5-0.25	12.0 [16.67W/ft]	13.2 [18.33W/ft]	>90	30°	2700K	800 [1110LM/ft]
									3000K	820 [1140LM/ft]
									4000K	880 [1220LM/ft]
Normal	MT20G	220mm [0.72ft]	48VDC 24-48VDC	0.5-0.25	12.0 [16.67W/ft]	13.2 [18.33W/ft]	>90	55°	2700K	740 [1030LM/ft]
									3000K	760 [1050LM/ft]
									4000K	820 [1140LM/ft]
Normal	MT20G	440mm [1.44ft]	48VDC	0.50 [0.35A/ft]	24.0 [16.67W/ft]	26.4 [18.33W/ft]	>90	30°	2700K	1600 [1110LM/ft]
									3000K	1630 [1140LM/ft]
									4000K	1750 [1220LM/ft]
Normal	MT20G	440mm [1.44ft]	48VDC	0.50 [0.35A/ft]	24.0 [16.67W/ft]	26.4 [18.33W/ft]	>90	55°	2700K	1480 [1030LM/ft]
									3000K	1520 [1050LM/ft]
									4000K	1630 [1140LM/ft]

Note:



1. The output data is based on the testing result of Ra90,4000k luminaires;

2. The tolerance of output data can be vary up to 10%;



3. The output data is typical value.

◎Optical Parameter

· Type Power:6W

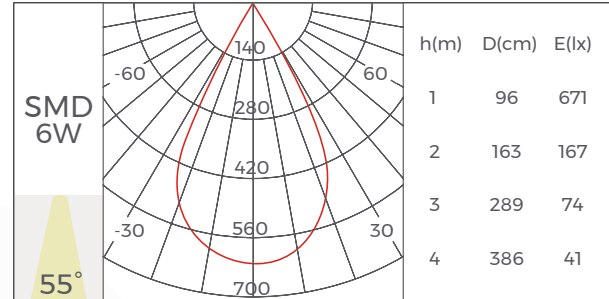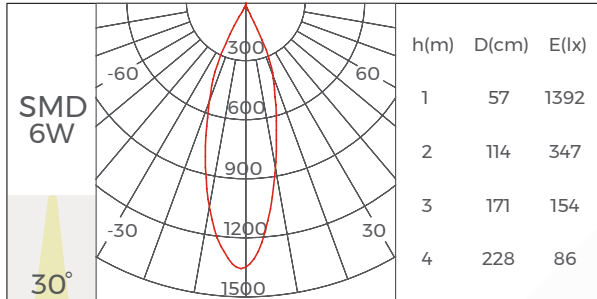

· Type Power:12W

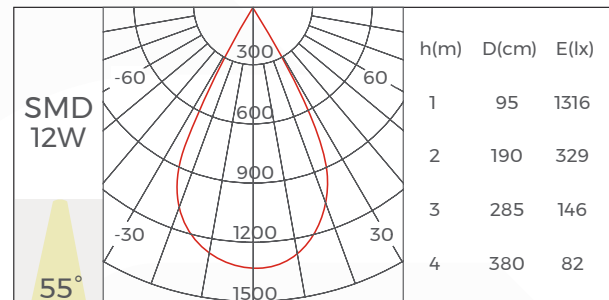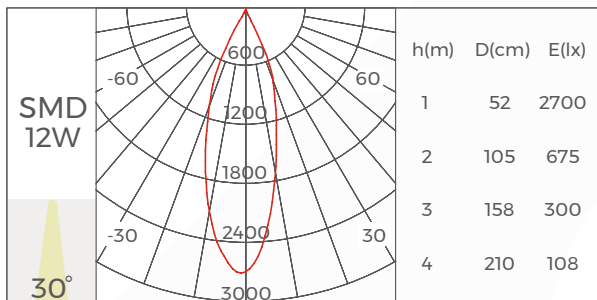

· Type Power:24W

